
REPORT ON LAND USE / VEGETATION COVER MAPPING OF BANDER COALFIELD BASED ON SATELLITE DATA OF THE YEAR 2021



Submitted to WESTERN COALFIELDS LIMITED NAGPUR, MAHARASTRA

MARCH 2022

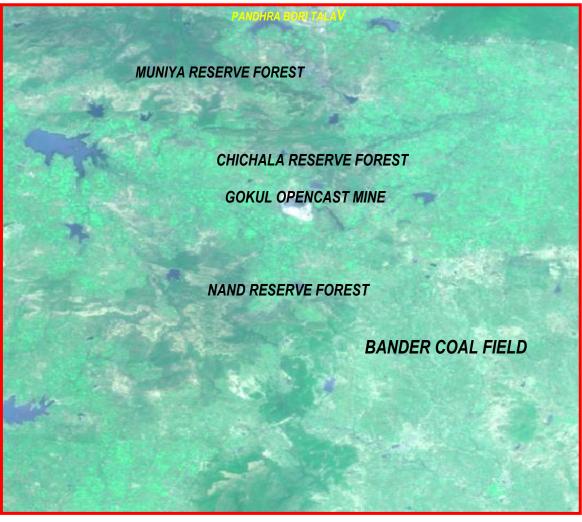

Land Use / Vegetation Cover Mapping of Bander Coalfield based on Satellite date of the year 2021

> Submitted to Western Coalfields Limited Nagpur

MARCH- 2022



Remote Sensing Cell Geomatics Division CMPDI(HQ), Gondwana Place, Kanke Road, Ranchi – 834 008 JHARKHAND

Document Control Sheet

(1)	Job No.	561410027
(2)	Publication Date	March 2021
(3)	Number of Pages	43
(4)	Number of Figures	15
(5)	Number of Tables	12
(6)	Number of plate	04
(7)	Number of Drawings	01
(8)	Title of the Report	Land Use / Vegetation Cover mapping of Bander Coalfield using satellite data of the year 2021
(9)	Aim of the Report	Preparation of land use/vegetation cover map of Bander Coalfields on 1:50,000 scale based on IRS – R2 / L4FX satellite data .of the year.
(10)	Executing Unit	Remote Sensing Cell Geomatics Division Central Mine Planning & Design Institute Ltd. Gondwana Place, Kanke Road, Ranchi
(11)	User Agency	Western Coalfield Limited , Nagpur
(12)	Author	B.K.Choudhary ,Chief Manager (RSC)
(13)	Security Restriction	Restricted Circulation
(14)	No. of Copies	6
(15)	Distribution Statement	Official

List of Figures

- 1.1 Map of India showing the location of Bander Coalfield.
- 2.1 Remote Sensing concept and methodology.
- 2.2 Electromagnetic Spectrum
- 2.3 Expanded Diagram of the visible and infrared regions.
- 2.4 Methodology of Land use/ Vegetation cover mapping.
- 2.5 Geoid-Ellipsoid Projection relationship.
- 2.6 Land use/Cover pattern in the year 2018
- 2.7 Land use/Cover pattern in the year 2021
- 2.8 Land Use/Cover pattern in modified boundary of Bander Coalfield For the year 2021.
- 3.3 Changes in settlement in the year 2018 & 2021
- 3.4 Changes in vegetation cover in the year 2018 & 2021
- 3.5 Changes in Agriculture land in the year 2018 & 2021
- 3.6 Changes in mining area in the year 2018 & 2021
- 3.7 Changes in waste land in the year 2018 & 2021
- 3.8 Changes in surface water body in the year 2018 & 2021

List of Tables

- 2.1 Electromagnetic Spectral Regions.
- 2.2 Characteristics of Satellite Sensor.
- 2.3 Classification Accuracy Matrix.
- 3.1 Land use / Vegetation Cover classes identified in Bander Coalfield.
- 3.2 Comparison of status of Land Use/ Vegetation Cover pattern in Bander Coalfield.
- 3.3 Distribution of Settlements in Bander Coalfield .
- 3.4 Distribution of Vegetation Cover in Bander Coalfield .
- 3.5 Distribution of Agriculture Land in Bander Coalfield .
- 3.6 Distribution of mining area in Bander Coalfield .

- 3.7 Distribution of Waste Land in Bander Coalfield .
- 3.8 Distribution of Surface Water in Bander Coalfield

List of Plates

- 1. FCC (Band 2,3,1) of Bander Coalfield based on Satellite data :IRS –R2 / L4FX of the Year 2021 with old coalfield boundary and block boundary.
- 2. Classified Land use/ Vegetation cover map of Bander Coalfield based on IRS –R2/ L4FX data of the year 2021. with old coalfield boundary and block boundary.
- 3 FCC (Band 2,3,1) of Bander Coalfield based on Satellite data -IRS –R2 / L4FX of the Year 2021 with modified coalfield boundary and block boundary.
- 4 Classified Land use/ Vegetation cover map of Bander Coalfield based on IRS –R2/ L4FX data of the year 2021 with modified boundary and block boundary.

List of Drawings

Following maps are prepared on 1:50000 scale:

 Plate No 1: Drawing No.HQ REM AO 2022 – Land use/cover map of Bander Coalfield based on satellite data IRS- R2-L4FX of the year 2021 with modified Coalfield boundary, Block boundary and other infrastructural details.

Contents

Description

Page No.

List of List of List of	ment Cor f Figures f Tables f Plates f drawing		iii iv iv v v
1.0	1.1 1.2 1.3	Location of the Area & Accessibility	1 1 2 3
2.0	Remo 2.1 2.2 2.3 2.4 2.5 2.6	te Sensing Concept & Methodology Remote Sensing Electromagnetic Spectrum Scanning System Data Source Characteristics of Satellite/Sensor Data Processing 2.6.1 Geometric Correction, rectification & geo-referencing 2.6.2 Image enhancement 2.6.3 Training set selection 2.6.4 Signature generation & classification 2.6.5 Creation / Overlay of vector database in GIS 2.6.6 Validation of classified image 2.6.7 Final land use /Vegetation cover map preparation	5-15
3.0	Land 3.1 3.2 3.3	Use/ Cover Mapping Introduction Land use/ Vegetation cover Classification Data Analysis in Bander Coalfield 3.3.1 Settlement 3.3.2 Vegetation Cover 3.3.3 Agriculture 3.3.4 Mining Area 3.3.5 Wasteland 3.3.6 Water Bodies	21-34

4.0 Conclusion and Recommendations

- 4.1 Conclusion
- 4.2 Recommendations

35

Chapter 1

Introduction

1.1 Project Reference

Coal India Limited requested CMPDI to take up the study based on remote sensing satellite data for creating the geo-environmental data base of coalfields for monitoring the impact of coal mining on land use and vegetation cover. Accordingly, a road map for implementation of the project was submitted to Coal India Ltd. for land use and vegetation cover mapping of 28 major coalfields for creating the geo-environmental data base and subsequent monitoring of impact of coal mining land environment at a regular interval of three years. A work order no. CIL/WBP/Env/2009/2428 dated 29.12.2009 was issued by CIL initially for three years. Subsequently, a revised work order was issued vide letter no. CIL/WBP/Env/2011/4706 dated 12.10.2012 from Coal India Limited for the period 2012-13 to 2016-17 for land reclamation monitoring of all the opencast projects as well as vegetation cover monitoring of 19 major coalfields including Bander Coalfield as per a defined plan for monitoring the impact of mining on Vegetation Cover, further an another work order was issued vide letter no: CIL/WBP/ENV/DP/8477 dated 21.09.2017 for the period 2017-18 to 2021-22 for land reclamation monitoring of all the opencast projects as well as vegetation cover monitoring of 19 major coalfields for monitoring the impact of mining on Vegetation Cover of respective coalfields.

1.2 Project Background

Western Coalfield Ltd. is a subsidiary of Coal India Limited, dedicated for maintaining the ecological balance in the region has initiated a massive plantation programme on backfilled area, OB dumps and wasteland. The advent of high resolution, multispectral satellite data has opened a new avenue in the field of mapping and monitoring of vegetation cover. The present study has been taken up to access the impact of coal mining on land use and

vegetation cover in Bander Coalfield with respect to the earlier study carried out for Bander Coalfield in the year 2018-19.

1.3 Objective

The objectives of the present study is to prepare land use/ cover map of part of Bander Coalfields covering the mining projects on a scale 1:50,000 based on satellite data of the year 2021 for creating the geo-environmental data base in respect of land use, vegetation cover, drainage, mining area, infrastructure etc. and regular updation of database at regular interval of three years to assess the impact of coal mining and other industrial activities on land use and vegetation cover in the coalfield area.

1.4 Location of the Area & Accessibility

Bander Coalfield (BCF), situated about 70 km south of Nagpur, consists of part of Nagpur and Chandrapur districts of Maharashtra State. The area is bounded between North Latitudes 20° 29' 06" to 20° 48' 22" and East Longitudes 79° 09' 15" to 79° 26' 39" and is covered by Survey of India (SoI) topo sheet Nos.55K/16 ,55 L/13,55L/14,55P/1, 55P/2, 55P/5 and 55P/6, 55O/4 55O/8 the location map and the incidence of study area on topo sheets are shown in Figure 1.1. The area extends to about 32 km in north-south direction and 35 km in east-west direction encompassing an area of about 361.09 sq. km.

BCF is approachable by road from Nagpur via Umrer on the northern side and Chandrapur on the southern side. Nand town, situated in the middle of the coalfield region, is connected with Umrer by all-weather tarred road, which in turn connects Bhisi and Bhagawanpur by fairweathered roads.

1.5 Drainage

Bander Coalfield region is drained by Nand river and its tributaries in the central, Kalhai river and its tributaries in the eastern and Uma river in the southern region. The general flow direction of the Nand river is from west to east and is locally characterized by open and closed meanders. Some of the tributaries pass through the Nand reserved forest in the western part of the coalfield. Kalhai river, though do not pass through the coalfield region, its tributaries are passing through the southern side of Bhisi village. Uma river in bander area originate from the Nand reserved forest and flow in the south-east direction.

1.6 Reserve Forest

The reserved forests in the Bander coalfield are Muniya and Chichala in the northern side, Mazrazeon and Wadhona in the central and Nand, Kasarbodi in the south western side.

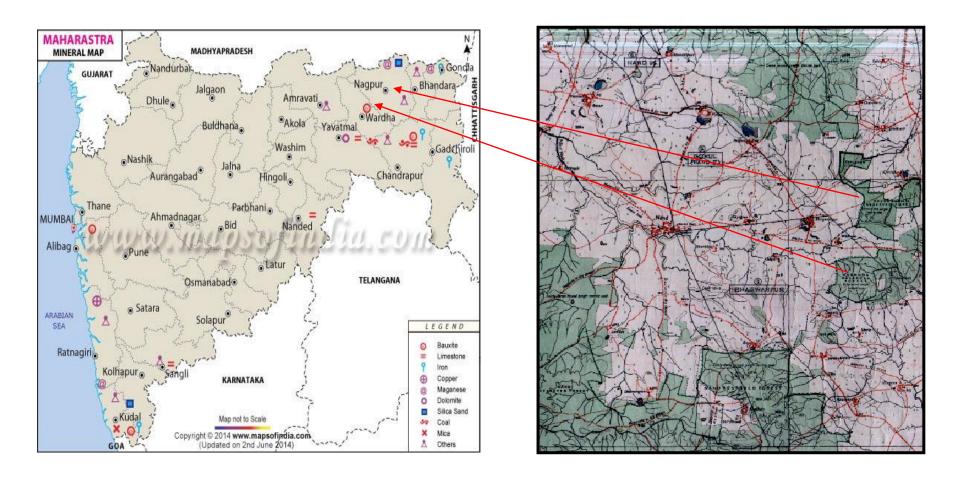


Figure 1.1 : Location Map of Bander Coalfield

Chapter 2


2.0 Remote Sensing Concepts and Methodology

2.1 Remote Sensing

Remote sensing is the science and art of obtaining information about an object or area through the

analysis of data acquired by a device that is not in physical contact with the object or area under investigation. The term *remote sensing* is commonly restricted to methods that employ electromagnetic energy (such as light, heat and radio waves) as the means of detecting and measuring object characteristics.

All physical objects on the earth surface continuously emit electromagnetic radiation because of the oscillations of their atomic particles. Remote sensing is largely concerned with the measurement of electro-magnetic energy from the

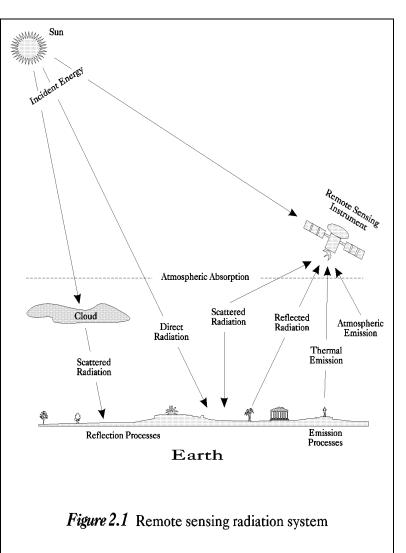

SUN, which is reflected, scattered or emitted by the objects on the surface of the earth. Figure 2.1 schematically illustrate the generalised processes involved in electromagnetic remote sensing of the earth resources.

2.2 Electromagnetic Spectrum

The electromagnetic (EM) spectrum is the continuum of energy that ranges from meters to nanometres in wavelength and travels at the speed of light. Different objects on the earth surface reflect different amounts of energy in various wavelengths of the EM spectrum.



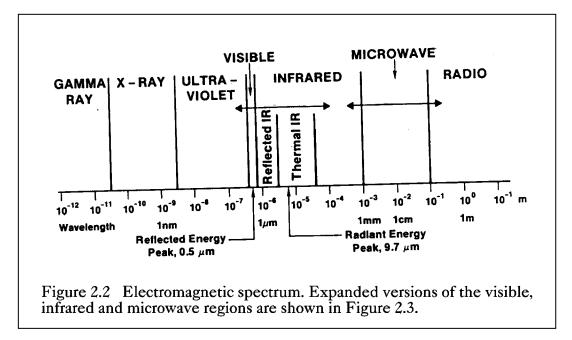


Figure 2.2 shows the electromagnetic spectrum, which is divided on the basis of wavelength into different regions that are described in Table 2.1. The EM spectrum ranges from the very short wavelengths of the gamma-ray region to the long wavelengths of the radio region. The visible region (0.4-0.7µm wavelengths) occupies only a small portion of the entire EM spectrum.

Energy reflected from the objects on the surface of the earth is recorded as a function of wavelength. During daytime, the maximum amount of energy is reflected at 0.5µm wavelengths, which corresponds to the green band of the visible region, and is called the *reflected energy peak* (Figure 2.2). The earth also radiates energy both day and night, with the maximum energy 9.7µm wavelength. This *radiant energy peak* occurs in the thermal band of the IR region (Figure 2.2).

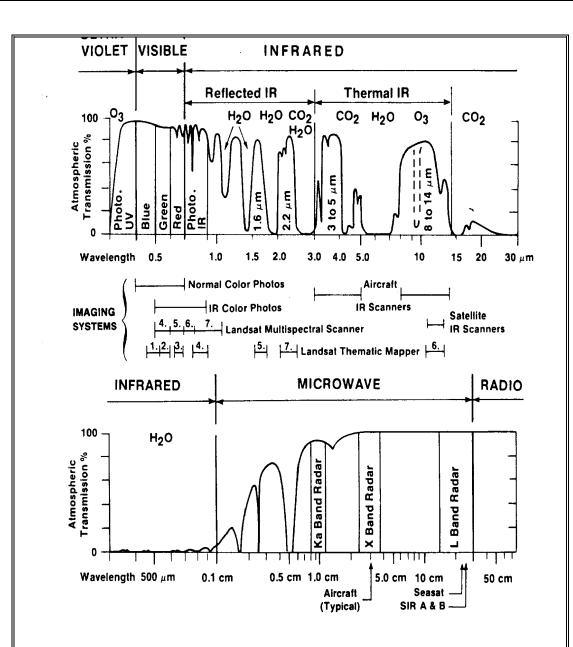



			J	
Region			Wavelength	Remarks
Gamma ray		<	0.03 nm	Incoming radiation is completely absorbed by the upper atmosphere and is not available for remote sensing.
X-ray	0.03	to	3.00 nm	Completely absorbed by atmosphere. Not employed in remote sensing.
Ultraviolet	0.03	to	0.40 μm	
Photographic UV band	0.30	to	0.40 µm	Transmitted through atmosphere. Detectable with film and photo detectors, but atmospheric scattering is severe.
Visible	0.40	to	0.70 μm	Imaged with film and photo detectors. Includes reflected energy peak of earth at 0.5mm.
Infrared	0.70	to	100.00 μm	Interaction with matter varies with wavelength. Absorption bands separate atmospheric transmission windows.
Reflected IR band	0.70	to	3.00 µm	Reflected solar radiation that contains no information about thermal properties of materials. The band from 0.7-0.9mm is detectable with film and is called the <i>photographic IR band</i> .
Thermal IR band	3.00	to	5.00 µm	Principal atmospheric windows in the thermal
	8.00	to		region. Images at these wavelengths are acquired by optical-mechanical scanners and special Videocon systems but not by film.
Microwave	0.10	to	30.00 cm	Longer wavelengths can penetrate clouds, fog and rain. Images may be acquired in the active or passive mode.
Radar	0.10	to	30.00 cm	Active form of microwave remote sensing. Radar images are acquired at various wavelength bands.
Radio		>	30.00 cm	

Table 2.1 Electromagnetic spectral regions

The earth's atmosphere absorbs energy in the gamma-ray, X-ray and most of the ultraviolet (UV) region; therefore, these regions are not used for remote sensing. Details of these regions are shown in Figure 2.3. The horizontal axes show wavelength on a logarithmic scale; the vertical axes show percent atmospheric transmission of EM energy. Wavelength regions with high transmission are called *atmospheric windows* and are used to acquire remote sensing data. The major remote sensing sensors records energy only in the visible, infrared and microwave regions. Detection and measurement of the recorded energy enables identification of surface objects (by their characteristic wavelength patterns or spectral signatures), both from air-borne and space-borne platforms.

2.3 Scanning System

The sensing device in a remotely placed platform (aircraft/satellite) records EM radiation using a scanning system. In scanning system, a sensor, with a narrow field of view is employed; this sweeps across the terrain to produce an image. The sensor receives electromagnetic energy radiated or reflected from the terrain and converts them into signal that is recorded as numerical data. In a remote sensing satellite, multiple arrays of linear sensors are used, with each array recording simultaneously a separate band of EM energy. The array of sensors employs a spectrometer to disperse the incoming energy into a spectrum. Sensors (or detectors) are positioned to record specific wavelength bands of energy. The information received by the sensor is suitably manipulated and transported back to the ground receiving station. The data are reconstructed on ground into digital images. The digital image data on magnetic/optical media consist of picture elements arranged in regular rows and columns. The position of any picture element, *pixel*, is determined on a x-y co-ordinate system. Each pixel has a numeric value, called digital number (DN), which records the intensity of electromagnetic energy measured for the ground resolution cell represented by that pixel. The range of digital numbers in an image data is controlled by the radiometric resolution of the satellite's sensor system. The digital image data are further processed to produce master images of the study area. By analysing the digital data/imagery, digitally/visually, it is possible to detect, identify and classify various objects and phenomenon on the earth surface.

Remote sensing technique provides an efficient, speedy and cost-effective method for assessing the changes in vegetation cover certain period of time due to its inherited capabilities of being multi-spectral, repetitive and synoptic aerial coverage.

2.4 Data Source

The following data are used in the present study:

• Primary Data

Raw satellite data obtained from National Remote Sensing Centre (NRSC), Hyderabad was used as primary data source for the study, The details of data specification is as follows: Satellite ID –IRS-R2. Sensor- L4FX, Sub Scene –A Band 1,2,3 Path # 100 Row # 058 A; Date of pass 01-JAN-2021. The detail specification of the data is also given in Table 2.2.

• Secondary Data

Secondary (ancillary) and ground data constitute important baseline information in remote sensing, as they improve the interpretation accuracy and reliability of remotely sensed data by enabling verification of the interpreted details and by supplementing it with the information that cannot be obtained directly from the remotely sensed data.

2.5 Characteristics of Satellite/Sensor

The basic properties of a satellite's sensor system can be summarised as:

(a) Spectral coverage/resolution, i.e., band locations/width; (b) spectral dimensionality: number of bands; (c) radiometric resolution: quantisation; (d) spatial resolution/instantaneous field of view or IFOV; and (e) temporal resolution. Table 2.2 illustrates the basic properties of IRS-R2/L4FX satellite/ sensor that is used in the present study.


Table 2.2 Characteristics of the satellite/sensor used in the present project work											
Platform	Sensor	Spectral Bands in nm	Radiometric Resolution	Spatial Resolution	Temporal Resolution	Country					
IRS-R2	L4FX	B2 0.52 - 0.59 Green B3 0.62 - 0.68 Red B4 0.77 - 0.88 NIR	16-bit (256-grey levels)	5.8 m	24 days	India					
NIR: Near I	NIR: Near Infra-Red										


2.6 Data Processing

The methodology for data processing carried out in the present study is shown in Figure 2.4.

The processing involves the following major steps:

- (a) Geometric correction, rectification and geo-referencing;
- (b) Image enhancement;
- (c) Training set selection;
- (d) Signature generation and classification;
- (e) Creation/overlay of vector database;
- (f) Validation of classified image;
- (g) Layer wise theme extraction using GIS
- (h) Final vegetation map preparation.

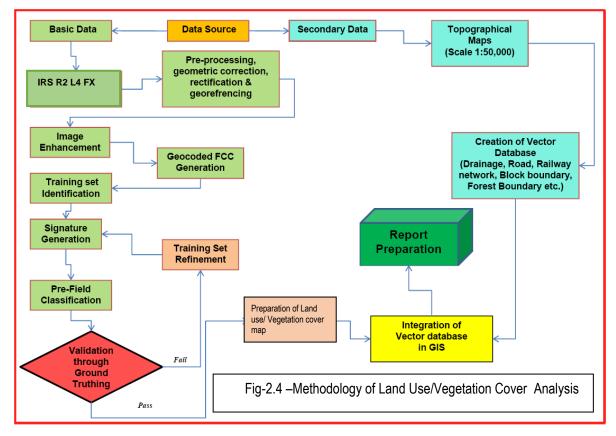



2.6.1 Geometric correction, rectification and georeferencing


Inaccuracies in digital imagery may occur due to 'systematic errors' attributed to earth curvature and rotation as well as 'non-systematic errors' attributed to intermittent sensor malfunctions, etc. Systematic errors are corrected at the satellite receiving station itself while non-systematic errors/ random errors are corrected in pre-processing stage.

In spite of 'System / Bulk correction' carried out at supplier end; some residual errors in respect of attitude attributes still remains even after correction. Therefore, fine tuning is required for correcting the image geometrically using ground control points (GCP).

Raw digital images contain geometric distortions, which make them unusable as maps. A map is defined as a flat representation of part of the earth's spheroidal surface that should conform to an internationally accepted type of cartographic projection, so that any measurements made on the map will be accurate with those made on the ground. Any map has two basic characteristics: (a) scale and (b) projection. While *scale* is the ratio between reduced depiction of geographical features on a map and the geographical features in the real world, *projection* is the method of transforming map information from a sphere (round Earth) to a flat (map) sheet. Therefore, it is essential to transform the digital image data from a generic co-ordinate system (i.e. from line and pixel co-ordinates) to a projected co-ordinate system. In the present study geo-referencing was done with the help of Survey of India (SoI) topo-sheets so that information from various sources can be compared and integrated on a GIS platform, if required.

An understanding of the basics of projection system is required before selecting any transformation model. While maps are flat surfaces, Earth however is an irregular sphere, slightly flattened at the poles and bulging at the Equator. Map projections are systemic methods for *"flattening the orange peel"* in measurable ways. When transferring the Earth and its irregularities onto the plane surface of a map, the following three factors are involved: (a) geoid (b) ellipsoid and (c) projection. Figure 2.5 illustrates the relationship between these three factors. The *geoid* is the rendition of the irregular spheroidal shape of the Earth; here the variations in gravity are taken into account. The observation made on the geoid is then transferred to a regular geometric

reference surface, the *ellipsoid*. Finally, the geographical relationships of the ellipsoid (in 3-D form) are transformed into the 2-D plane of a map by a transformation process called map projection. As shown in Figure 2.5, the vast majority of projections are based upon *cones*, *cylinders* and *planes*.

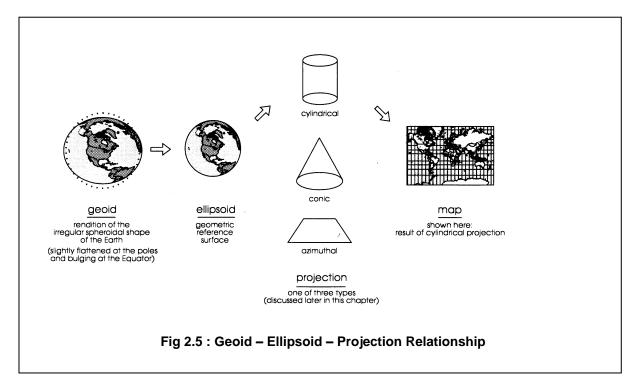

In the present study, UTM Projection and spheroids WGS 84 and Zone -44 was used so as to prepare the map compatible with the Sol topo-sheets. Polyconic projection is used in Sol topo-sheets as it is best suited for small-scale mapping and larger area as well as for areas with North-South orientation (viz. India). Maps prepared using this projection is a compromise of many properties; Distances, areas and shapes are true only along central meridian. Distortion increases away from central meridian. Image transformation from generic co-ordinate system to a projected co-ordinate system was carried out using ERDAS Imagine s/w version 2014 digital image processing system.

2.6.2 Image enhancement

To improve the interpretability of the raw data, image enhancement is necessary. Most of the digital image enhancement techniques are categorised as either point or local operations. Point operations modify the value of each pixel in the image data independently. However,

local operations modify the value of each pixel based on brightness value of neighbouring pixels. Contrast manipulations/ stretching technique based on local operation were applied on the image data using Erdas Imagine s/w version 2014.

2.6.3 Training set selection

The image data were analysed based on the interpretation keys. These keys are evolved from certain fundamental image-elements such as tone/colour, size, shape, texture, pattern, location, association and shadow. Based on the image-elements and other geo-technical elements like land form, drainage pattern and physiography; training sets were selected/ identified for each land use/cover class. Field survey was carried out by taking selective traverses in order to collect the ground information (or reference data) so that training sets are selected accurately in the image. This was intended to serve as an aid for classification. Based on the variability of land use/cover condition and terrain characteristics and accessibility, 90 points were selected to generate the training sets.

2.6.4 Signature generation and classification

Image classification was carried out using the minimum distance algorithm. The classification proceeds through the following steps: (a) calculation of statistics [i.e. signature generation] for the identified training areas, and (b) the decision boundary of maximum probability based on the mean vector, variance, covariance and correlation matrix of the pixels.

After evaluating the statistical parameters of the training sets, reliability test of training sets was conducted by measuring the statistical separation between the classes that resulted from computing divergence matrix. The overall accuracy of the classification was finally assessed with reference to ground truth data. The aerial extent of each land use class in the coalfield was determined using Erdas Imagine software version 2014. The classified image for the year 2021 for Bander Coalfield is shown in Drawing No. HQ/REM/A0/01/2022.

2.6.5 Creation/overlay of vector database in GIS

Plan showing leasehold areas of mining projects supplied by Exploration are superimposed on the image as vector layer in the GIS database. Road network, rail network and drainage network are digitised on different vector layers in GIS database. Layer wise theme extraction was carried out using ArcGIS s/w and imported the same on GIS platform for further analysis.

2.6.6 Validation of classified image

Ground truth survey was carried out for validation of the interpreted results from the study area. Based on the validation, classification accuracy matrix was prepared. The overall classification accuracy of the satellite data for the year 2021 was found to be 84.25%.

2.6.7 Final Land use/Vegetation cover map preparation

Final classified land Use/ Vegetation cover map was printed using HP Design jet T7200 Colour Plotter .The map are prepared on 1:50000 scale as drawing No. HQ/REM/A0/2022 enclosed with the report.

Table 2.3: Classification Accuracy Matrix for Bander Coalfield in the year 2021

SI. No.	Classes in the Satellite Data	Class	Total Obsrv. Points	Land use classes as observed in the field														
				C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15
1	Urban Settlement	C1	05	03	1	1												
2	Rural Settlement	C2	07	1	06	1												
3	Industrial Settlement	C3	05		1	04												
4	Dense Forest	C4	18				17	1										
5	Open Forest	C5	20				1	18	1									
6	Scrubs	C6	12					1	11	1	1							
7	Soc. Forestry	C7	08						1	04	1	1						
8	Agriculture Land	C8	23						1	1	21							
9	Waste Upland	C9	17	1								16						
10	Fly Ash Pond	C10	5							1		1	04					
11	Sand Body	C11	03									1		02				
12	Coal dump	C12	05									1			04			
13	Coal Quarry	C13	05													05		
14	Barren OB Dump	C14	06										1				05	
15	Water Bodies	C15	11															11
То	tal no. of observation p	oints	150	05	07	05	18	20	12	08	23	17	05	03	05	05	06	11
%	of commission			20.00	28.57	40.00	5.55	10.00	25.00	25.00	4.34	18.75	80.00	0.00	0.00	0.00	0.00	0.00
%	of omission			40.00	28.57	20.00	5.55	10.00	8.33	37.50	8.70	5.88	40.00	33.33	20.00	0.00	20.00	0.00
%	of Classification Accura	acy		60.00	85.71	80.00	94.45	90.00	91.66	50.00	91.30	94.11	80.00	66.66	80.00	100.0	100.0	100.0
	rall Accuracy (%)	-						84	4.25									

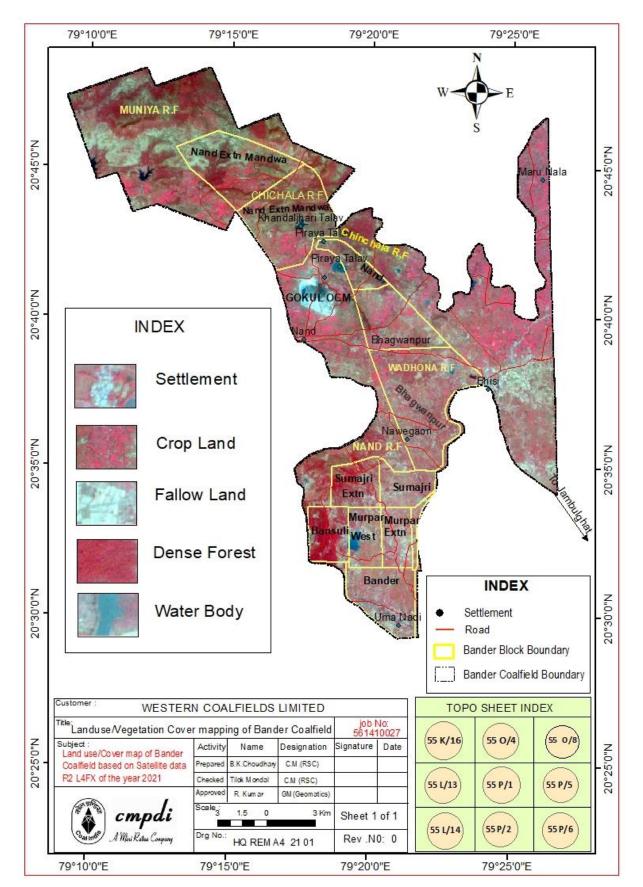


PLATE:1 FCC (Band 3,2,1) of Bander CF based on Satellite data (IRS-R2-L4-FX) of the year 2018

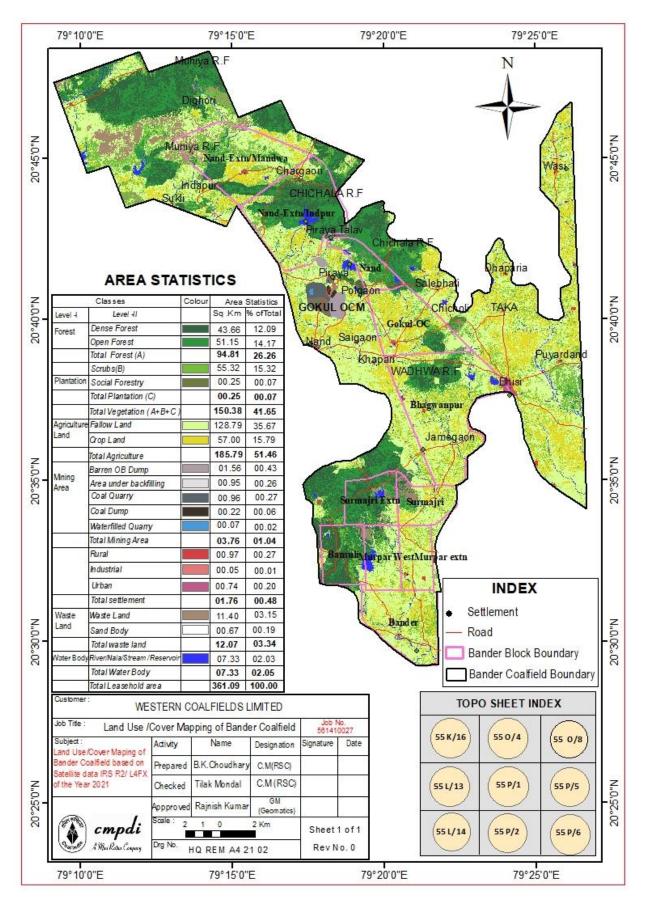


PLATE:2 LU/LC Map of Bander CF based on Satellite data (IRS-R2-L4FX)



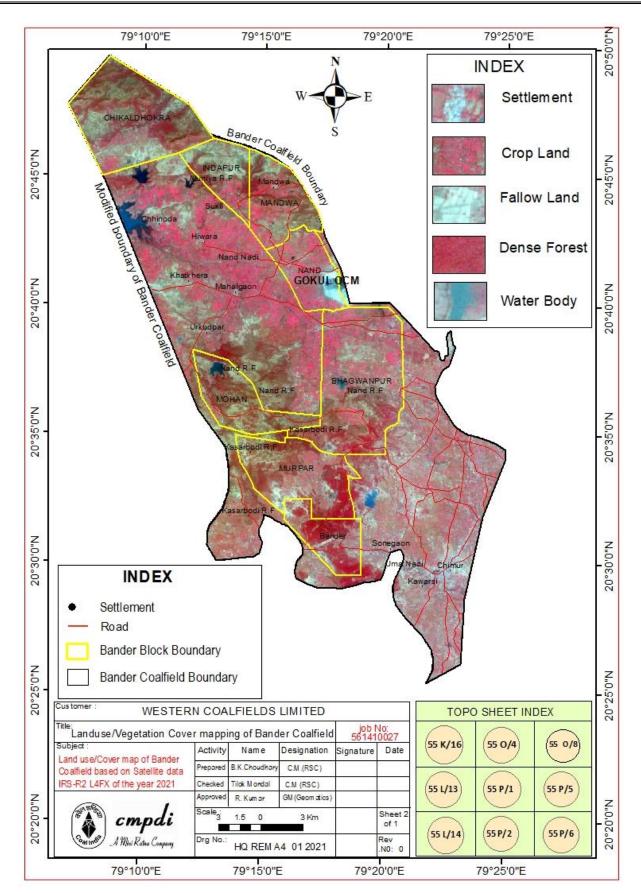


PLATE:3 FCC(Band 3,2,1) of Bander CF based on satellite data (IRS-R2-L4FX) of the Year 2021

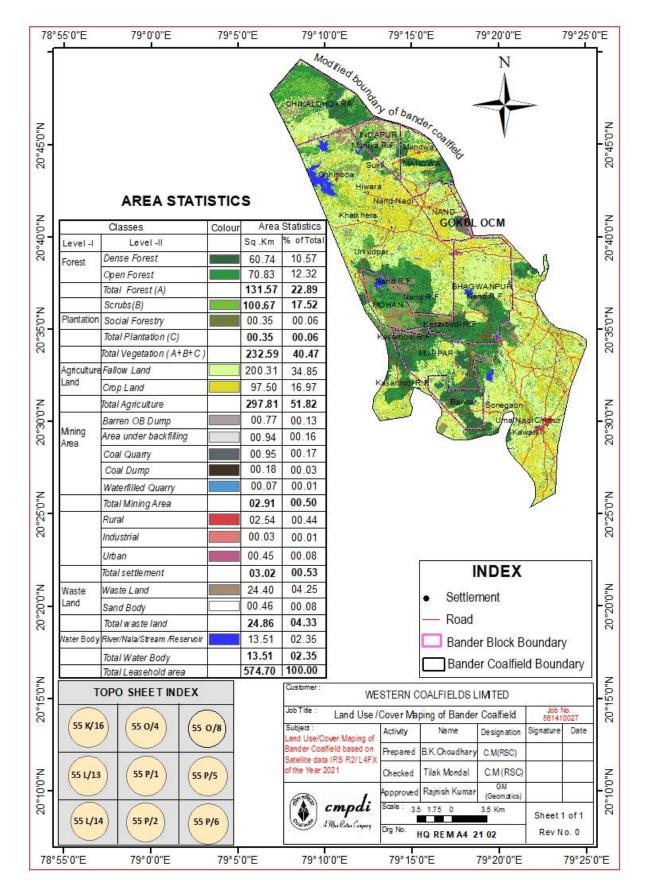



Chapter 3

3.0 Land Use/ Vegetation Cover Monitoring

3.1 Introduction

The need for information on land use/ vegetation cover has gained importance due to the allround concern on environmental impact of mining. The information on land use/cover inventory that includes spatial distribution, aerial extent, location, rate and pattern of change of each category is of paramount importance for assessing the impact of coal mining on land use / vegetation cover. Moreover, with passage of time, demand for coal has increased many folds and therefore production from the mines has also increased and hence the mining areas also kept on increasing. Therefore, it is important to know the existing land use pattern and the changes that have occurred during previous years, so as to predict the possible changes due to mining in future around the existing coal mines. Remote sensing data with its various spectral and spatial resolutions, offers comprehensive and accurate information for mapping and monitoring of land use/cover over a period of time.

Realising the need of monitoring of land use/ vegetation cover and land reclamation in Bander Coalfield; CIL/WCL requested the services of CMPDI to prepare land use/ vegetation cover map for assessing the impact of coal mining on land use pattern and vegetation cover using remote sensing data at an interval of three years which will help in formulating the mitigative measure, if any required for environmental protection in the coal mining area.

The present study incorporates the findings on Land use / Vegetation Cover pattern in the Bander Coalfield, WCL based on satellite data of the year 2021. Similar study was carried out previously in the year 2018.

3.2 Land Use / Vegetation Cover Classification

The array of information available on land use/ vegetation cover requires arranging or grouping under a suitable framework in order to facilitate the creation of database. Further, to accommodate the changing land use/vegetation cover pattern, it becomes essential to develop a standardised classification system that is not only flexible in nomenclature and definition, but also capable of incorporating information obtained from the satellite data and other different sources.

The present framework of land use/cover classification has been primarily based on the '*Manual* of *Nationwide Land Use/ Land Cover Mapping Using Satellite Imagery*' developed by National Remote Sensing Centre, Hyderabad, which has further been modified by CMPDI for coal mining areas. Land use/vegetation cover map was prepared on the basis of image interpretation carried out based on the satellite data for the year 2018. Following land use/cover classes are identified in the Bander coalfield region (Table 3.1).

3.3 Data Analysis

Satellite data of the year 2021 was processed using ERDAS EMAGINE 14.0 IMAGE processing s/w in order to interpret the various land use and vegetation cover classes present in the study area of Bander coalfield.. It is important to note that for the year 2021, analysis has been made on the basis of *updated coalfield boundary* covering the area of 574.70 Sq. Km .(Sources: Exploration) .All the forthcoming report on Land use/Vegetation cover Mapping of Bander Coalfield would be based on this updated coalfield boundary only.

In this report, the area of each class present in the Coalfield boundary of Bander Coalfield was calculated and analysed using ERDAS EMAGINE 14.0 digital image processing s/w. Comparison and analysis of land use/Vegetation cover pattern in Bander coalfield in the year 2021 with respect to the year 2018 is given in table -3.2. Area statistics of each land use class in Bander Coalfield covering area of 574.70 Sq.km is also given in subsequent Table-3.3. Data obtained in the year 2021 with respect to updated coalfield boundary of Bander coalfield will be

used as a base data for analysis and comparison of status of land Use& Vegetation cover pattern in the year 2024. Comparision of identified land use/vegetation cover classes in Bander coalfield boundary has not been made with satellite data of the year 2021 with respect to the satellite data of the year 2018 due to updation of leasehold boundary of BCF in the year 2021.

	Table 3.1 Land use / Vegetation Cover classes identified in Bander Coalfield									
	LEVEL – I LEVEL- II									
1	Vegetation Cover	1.1 Dense Forest1.2 Open Forest1.3 Scrub1.4 Plantation under Social Forestry								
2	Mining Area	2.1 Coal Quarry2.2 Area under backfilling.2.3 Water filled Quarry2.4 Barren OB Dump2.5 Coal Dump								
3	Agricultural Land	3.1 Crop Land; 3.2 Fallow Land								
4	Wasteland	4.1 Waste upland with/without scrub4.2 Sand Body								
5	Settlements	5.1 Rural 5.2 Industrial 5.3 Urban								
6	Water Bodies 6.1 River/Streams /Reservoir ,Nalliah etc									

TABLE-3.2

COMPARISION OF STATUS OF LAND USE & VEGETATION COVER PATTERN IN BANDER COALFIELD IN THE YEAR 2018 & 2021

						- 1	-
	Year 2018		Year 2021		Change w	.r.t Yr 2018	Remarks
LAND USE CLASSES	Area(Km ²)	% age	Area(Km ²)	% age	Area(Km ²)	% age]
SETTLEMENT							1
Urban	0.75	0.21	0.74	0.20	-0.01	-0.01	Minor Changes in area of total settlement is due to
Industrial	0.06	0.02	0.05	0.01	-0.01	-0.01	increase in mining activities in Coalfield region and
Rural	0.94	0.26	0.97	0.27	0.03	0.01	associated socio-economic reasons.
Total Settlement	1.75	0.49	1.76	0.48	0.01	-0.01]
VEGETATION COVER							
FOREST Dense Forest	43.66	12.09	43.66	12.09	0.00	0.00	Minor change in Forest Cover due to increase in open
Open Forest	43.00 50.86	14.09	43.00 51.15	12.09	0.00	0.00	forest as some of scubs has been converted into Open
Total Forest (A)	94.52	26.18	94.81	26.26	0.29 0.29	0.08	Forest
SCRUBS	94.52	20.10	94.01	20.20	0.29	0.00	Decrease of area in scrub may due to Biotic interference
Scrub (B)	59.12	16.37	55.32	15.32	-3.80	-1.05	or natural degradation.
PLANTATION							
Social Forestry	0.22	0.06	0.25	0.07	0.03	0.01	
Total Plantation (C)	0.22	0.06	0.25	0.07	0.03	0.01	Decrease in Vegetation Cover is due to decrease in
Total Vegetation							scrubs as some of scrubs has been converted into waste
Cover(A+B+C)	153.86	42.61	150.38	41.65	-3.48	-0.96	land and area of agriculture land(crop land &Fallow
		-					Land) and increase in mining activities.
AGRICULTURE	I						1
Crop Land	42.37	11.73	57.00	15.79	14.63	4.06	Increase in Agriculture Land due to decrease in fallow
Fallow Land	142.94	39.59	128.79	35.67	-14.15	-3.92	land and good monsoon.
Total Agriculture	185.31	51.32	185.79	51.46	0.48	0.14	
MINING AREA		1		T			
Coal Quarry	1.16	0.32	0.96	0.27	-0.20	-0.05	Coal Quarry has decreased due to increase in area under backfilling.
Advance Quarry site	0.19	0.05	0.00	0.00	-0.19	-0.05	1
Waterfilled Quarry	0.06	0.02	0.07	0.02	0.01	0.00	Technical Reclamation in Gokul OCP has been
Area under Backfilling	0.00	0.00	0.95	0.26	0.95	0.26	increased due to increase in area under backfilling.
Barren OB Dump	1.34	0.37	1.56	0.43	0.22	0.06	OB dump has increased due to increase in mining activity .
Coal Dump	0.09	0.02	0.22	0.06	0.13	0.04	
Total Mining Area	2.84	0.78	3.76	1.04	0.92	0.26	
WASTELANDS		<u> </u>			<u> </u>		
Waste Land with/Without Scrubs	9.39	2.60	11.40	3.15	2.01	0.55	Increase in waste Land due to decrease in area of scrubs
Sand	0.68	0.19	0.67	0.19	-0.01	0.00	
Total Waste Land	10.07	2.79	12.07	3.34	2.00	0.55	
WATER BODY				0.04		0.00	I
Water Body	7.26	2.01	7.33	2.03	0.07	0.02	Surface water bodies has increased due to good
Total Water Body	7.26	2.01	7.33	2.03	0.07	0.02	monsoon.
Total	361.09	100.00	361.09	100.00	0.00	0.00	

TABLE: 3.3

STATUS OF LAND USE/VEGETATION COVER IN MODIFIED BOUNDARY
OF BANDER COALFELD BASED ON SATELLITE DATA OF THE YEAR 2021

CI	asses	Colour	Area Statistics			
Level -I	Level -II		Sq .Km	% of Total		
Forest	Dense Forest		60.74	10.57		
	Open Forest		70.83	12.32		
	Total Forest (A)		131.57	22.89		
	Scrubs(B)		100.67	17.52		
Plantation	Social Forestry		00.35	00.06		
	Total Plantation (C)		00.35	00.06		
	Total Vegetation (A+B+C)		232.59	40.47		
Agriculture	Fallow Land		200.31	34.85		
Land	Crop Land		97.50	16.97		
	Total Agriculture		297.81	51.82		
	Barren OB Dump		00.77	00.13		
MiningArea	Area under backfilling		00.94	00.16		
MiningArea	Coal Quarry		00.95	00.17		
	Coal Dump		00.18	00.03		
	Waterfilled Quarry		00.07	00.01		
	Total Mining Area		02.91	00.50		
Settlement	Rural		02.54	00.44		
	Industrial		00.03	00.01		
	Urban		00.45	00.08		
_	Total settlement		03.02	00.53		
Waste Land	Waste Landwith/without Scrubs		24.40	04.25		
	Sand Body		00.46	00.08		
	Total waste land		24.86	04.33		
Water Body	River/Nala/Stream /Reservoir etc		13.51	02.35		
	Total Water Body		13.51	02.35		
	Total Leasehold area		574.70	100.00		

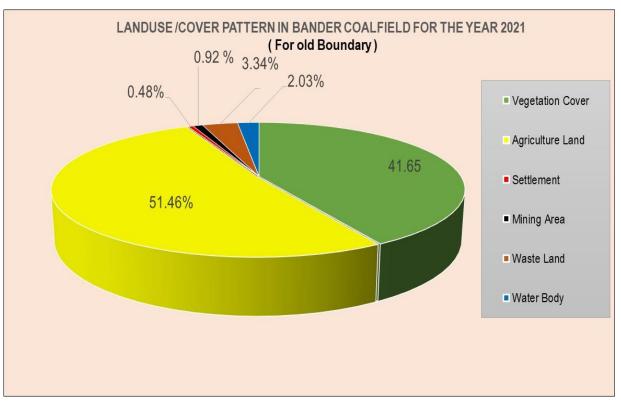
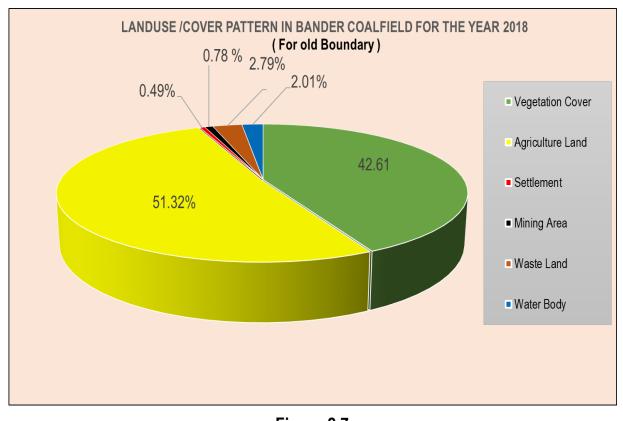


Figure-2.6



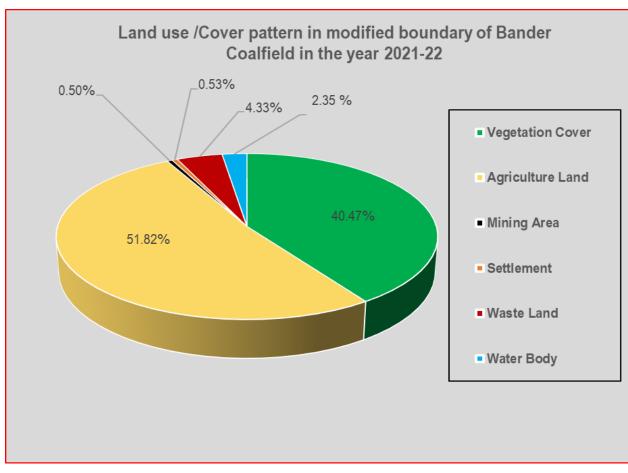


Figure: 2.8

3.3.1 Settlement/ Built-up land


All the man-made constructions covering the land surface are included under this category. Built-up land has been divided in to rural, urban and industrial classes based on availability of infrastructure facilities. In the present study, industrial settlement indicates only industrial complexes excluding residential facilities. The percentage of settlement shown in the analysis here is in terms of total land use cover only.

	Status of change in Settlement in Bander Coamerd during year 2010 & 2021												
LAND USE	Year 2	018	Year	[.] 2021	Change w.	r.t Yr 2018	Remarks						
CLASSES	Area(Km ²)	% age	Area(Km ²)	% age	Area(Km ²)	% age							
SETTLEMEN													
Urban	0.75	0.21	0.74	0.20	-0.01	-0.01	Minor Changes in area of total settlement						
Industrial	0.06	0.02	0.05	0.01	-0.01	-0.01	is due to increase in mining activities in						
Rural	0.94	0.26	0.97	0.27	0.03	0.01	Coalfield region and associated socio-						
Total	1.75	0.49	1.76	0.48	0.01	-0.01	economic reasons.						

 Table-3.3

 Status of change in Settlement in Bander Coalfield during year 2018 & 2021

It is indicated from Table-3.3 that Urban settlements within bander coalfield has decreased by 0.01 sq.km which is about 0.01% of the total coalfield area. Whereas rural settlement has grown up to 0.97 sq km (0.27%) as compared to 0.94 sq.km (0.26%) in the year 2018. It is also observed from above table-3.3 that total settlement in Bander coalfield covers an area of 1.76 sq.km(0.48%) in the year 2021, as compared to 1.75 Sq km (0.48%) in the year 2018. There is increase in 0.01 sq.km in the area of settlement in the year 2021. This increase of 0.01 sq.km in the area of settlement is due to increase in Rural settlement. The distribution of settlement in the year 2018 and 2021 is shown in bar chart Fig -3.3

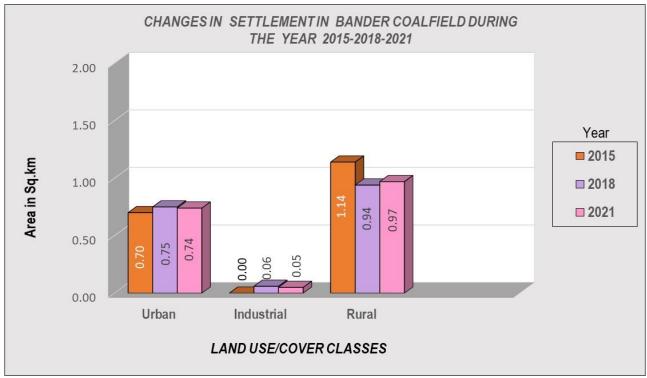



3.3.2 Vegetation cover Analysis

Vegetation cover is an association of trees and other vegetation type capable of producing timber and other forest produce. It is also defined as the percentage of soil which is covered by green vegetation. Leaf area index (LAI) is an alternative expression of the term vegetation cover which gives the area of leaves in m² corresponding to an area of one m² of ground. Primarily vegetation cover is classified into the following three sub-classes based on crown density as per modified FAO-1963 (Food & Agricultural Organisation of United Nations) norms: (a) dense forest

(crown density more than 40%), (b) open/degraded forest (crown density between 10% to 40%), and (c) scrubs (crown density less than 10%). The plantation that has been carried out on wasteland along the roadside is also included under vegetation cover. The percentage of vegetation cover shown in the analysis here are in terms of total land use cover only.

				Table-	3.4				
LAND USE	Year 20)18	Year 20)21	Change v 201		Remarks		
CLASSES	Area(Km ²)	% age	Area(Km ²)	% age	Area(Km ²) % age				
VEGETATION C	OVER		•						
FOREST									
Dense Forest	43.66	12.09	43.66	12.09	0.00	0.00	Minor change in Forest		
Open Forest	50.86	14.09	51.15	14.17	0.29	0.08	Cover is due to increase in		
Total Forest (A)	94.52	26.18	94.81	26.26	0.29	0.08	open forest as some of scrubs has been converted into Open Forest.		
SCRUBS			L				Decrease of area in scrub		
Scrub (B)	59.12	16.37	55.32	15.32	-3.80	-1.05	may be due to Biotic interference or natural degradation.		
PLANTATION			-				•		
Social Forestry	0.22	0.06	0.25	0.07	0.03	0.01			
Total Plantation (C)	0.22	0.06	0.25	0.07	0.03	0.01	Decrease in Vegetation Cover is due to decrease in		
Total Vegetation Cover(A+B+C)	153.86	42.61	150.38	41.65	-3.48	-0.96	scrubs as some of scrubs has been converted into waste land and area of agriculture land(crop land &Fallow Land) and increase in mining activities.		

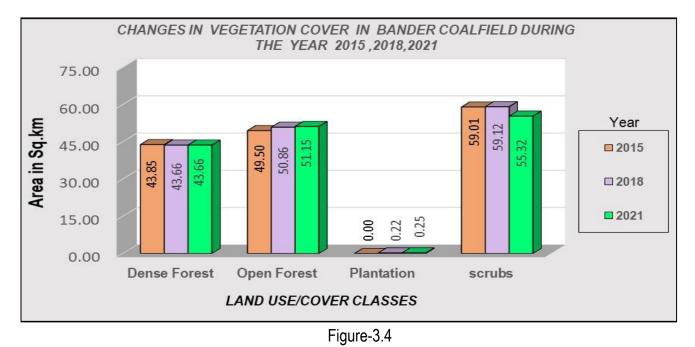


Table-34

Analysis of the satellite data of the year 2021 from Table-3.4 indicates that vegetation cover in Bander Coalfield boundary occupies 150.38 km² (41.65%), out of which, *dense forest* covers an area of 43.66 km² (12.09%), *open forest* covers area of 51.15 km² (14.17%); *Scrubs* covers an area of 55.32km² (15.32%), and plantation under Social Forestry occupies an area of 0.25 km² (0.07%) in 2021.Area of total vegetation cover decreased from 153.86 Sq.km in 2018 to 150.38 Sq.km in the year 2021. This decrease of 3.48 sq.km in area of vegetation cover is due to decrease in area of scrubs which has decreased from 59.12 Sq.km the year 2018 to 55.32 Sq.km in the year 2021. This decrease of 3.80 Sq.km in area occupied by scrubs is due to increase in open forest which has increased from 50.86 Sq.km area (Yr.2018) to 51.15 Sq.km area (Yr.2021).and mining area that has increased from 2.84 Sq.km area (Yr.2018) to 3.76 Sq.km area (Yr.2021) as indicated in Table-3.4. Plantation under social forest has also increased from 0.22 Sq.km in the year 2018 to 0.25 Sq.km in the year 2021. This increase of 0.03 Sq.km area in social forestry is due to more plantation has been carried out along road side and in the vicinity of coalfield area. The distribution of vegetation cover is shown in bar chart (Refer figure-3.4)

3.3.3 Agriculture

Land primarily used for farming and production of food, fibre and other commercial and horticultural crops falls under this category. It includes crop land and fallow land. *Crop lands* are those agricultural lands where standing crop occurs on the date of satellite imagery or land is used for agricultural purposes during any season of the year. Crops may be either kharif or rabi. *Fallow lands* are also agricultural land which is taken up for cultivation but temporarily allowed to rest, uncropped for one or more season. In this study, both crop land and fallow land has been combined in single class namely agricultural land.

Table-3.5 Status of change in Agriculture Land in Bander Coalfield during year,2018 & 2021												
LAND USE	Year 20	18	Year 20	21	Change w. 2018	r.t Yr	Remarks					
CLASSES	Area(Km ²)	% age	Area(Km ²)	% age	Area(Km ²)	% age						
AGRICULTUR	E LAND											
Crop Land	42.37	11.73	57.00	15.79	14.63	4.06	Increase in Agriculture Land due to					
Fallow Land	142.94	39.59	128.79	35.67	-14.15	3.92	decrease in fallow land and good					
Total Agriculture	185.31	51.32	185.79	51.46	0.48	0.14	monsoon.					

Analysis of the satellite data of the year 2021 from table-3.5 indicate that area of total agricultural land occupied in the coalfield boundary of Bander Coalfield covers is 185.79 km² (51.46%); out of which crop land covers an area of 57.00 km² (15.79%) and Fallow Land covers area of 128.79 km² (35.67%) of total area of bander coalfield boundary. There is decrease in area of fallow land from 142.94 Sq.km in the year 2018 to 128.79 Sq.km in the year 2021. This decrease in 14.15 km² in total agriculture land is due to increase in crop land . Distribution of agriculture land in bander coalfield is depicted in bar chart figure -3.5.

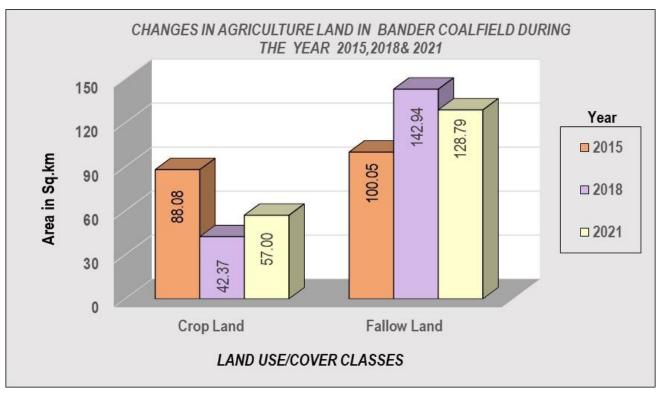


Figure-3.5

3.3.4 Mining

The mining area includes the area of existing quarry, old quarries filled with water, advance quarry sites, Coal Stock/Dumps, Coal Faces, Barren Backfilled areas, Barren over-burden dumps and allied activities.

Status of change in mining Area in Bander Coamerd during year 2010 & 2021									
LAND USE CLASSES	Year 2018		Year 2021		Change w.r.t Yr 2018		Remarks		
	Area(Km ²)	% age	Area(Km ²)	% age	Area(Km ²)	% age			
MINING AREA									
Coal Quarry	1.16	0.32	0.96	0.27	-0.20	-0.05	Coal Quarry has decreased due to increase		
Advance Quarry site	0.19	0.05	0.00	0.00	-0.19	-0.05	in area under backfilling.		
Waterfilled Quarry	0.06	0.02	0.07	0.02	0.01	0.00	Technical Reclamation in Gokul OCP has		
Area under Backfilling	0.00	0.00	0.95	0.26	0.95	0.26	been increased due to increase in area under backfilling.		
Barren OB Dump	1.34	0.37	1.56	0.43	0.22	0.06	OB dump has increased due to increase in		
Coal Dump	0.09	0.02	0.22	0.06	0.13	0.04	mining activity .		
Total Mining Area	2.84	0.78	3.76	1.04	0.92	0.26			

Table-3.6Status of change in Mining Area in Bander Coalfield during year 2018 & 2021

It is observed from table 3.6 that the mining area in Bander Coalfield covers 3.76 km² (1.04%) in the year 2021, out of which Coal quarry constitutes 0.96 km² (0.27 %), Barren OB Dumps constitute 1.56 km² (0.43%), Coal dumped/ stocks constitute 0.22 km² (0.06%) and *Water filled quarry covers an area of* 0.07 km² (0.02%).

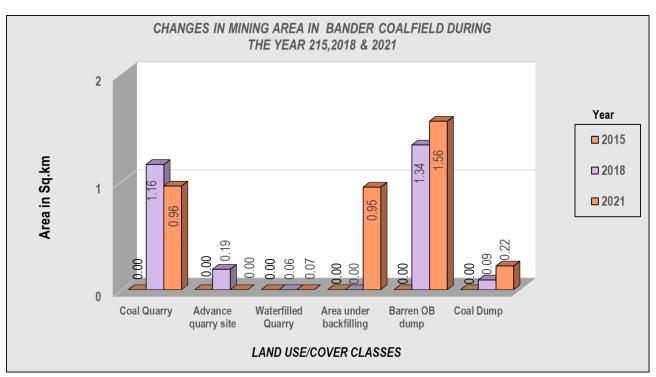


Figure-3.6

Area of Coal quarry has decreased from 1.16 Sq.km (0.32%) in the year 2018 to 0.96 Sq, km (0.27%) in the year 2021. This decrease of 0.20 Sq.km in the area under coal quarry is due to increase in area under backfill to the tune of 0.95 (0.26 %) as compared to the year 2018 (Refer table-3.6).

3.3.5 Wasteland

Wasteland is a degraded and under-utilised class of land that has deteriorated on account of natural causes or due to lack of appropriate water and soil management. Wasteland can result from inherent / imposed constraints such as location, environment, chemical and physical properties of the soil or financial or other management constraints (NWDB, 1987).

LAND USE CLASSES	Year 2018		Year 2021		Change w.r.t Yr 2018		Remarks		
LAND USE CLASSES	Area(Km ²)	% age	Area(Km ²)	% age	Area(Km ²)	% age			
WASTELANDS									
Waste Land with/Without Scrubs	9.39	2.60	11.40	3.15	2.01	0.55	Increase in waste Land due to decrease in area of		
Sand	0.68	0.19	0.67	0.19	-0.01	0.00	scrubs .		
Total Waste Land	10.07	2.79	12.07	3.34	2.00	0.55			

Table-3.7
 Status of change in Waste Land in Bander Coalfield during year 2018 & 2021

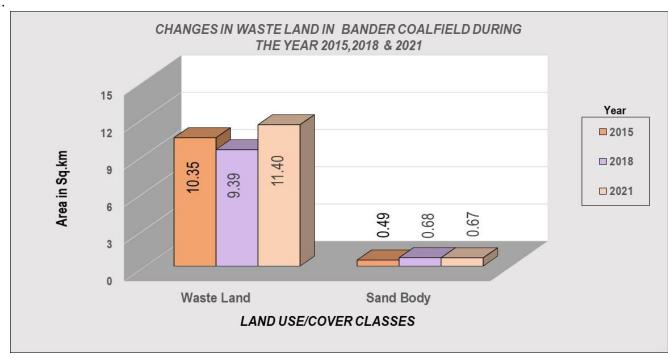


Figure-3.7

Analysis of data contained in Table 3.7 reveals that waste land in the Bander Coalfield occupies 12.07 Sq.km² (3.34%) in the Year 2021, out of which *Waste upland with or without scrubs* occupies 11.40 km² area (3.15%), and *Sand bodies* constitute 0.67 km² (0.19%) area

3.3.5 Surface Water bodies

Table-3.8Status of Change in Water Body in Bander Coalfield during year 2018 & 2021

LAND USE CLASSES	Year 2018		Year 2021		Change w.r.t Yr 2018		Remarks	
	Area(Km ²)	% age	Area(Km ²)	% age	Area(Km ²)	% age		
WATER BODY								
Water Body	7.26	2.01	7.33	2.03	0.07	0.02	Surface water bodies has increased due to	
Total Water Body	7.26	2.01	7.33	2.03	0.07	0.02	good monsoon.	

Analysis of data contained in table 3.8 reveals that water bodies in Bander Coalfield occupy area of 7.33 (2.03%) in the rear 2021 as compared to 7.26 km² (2.01%) in the year 2018. There is an increase of .07 km² area (0.02%) in surface water body in the year 2021.

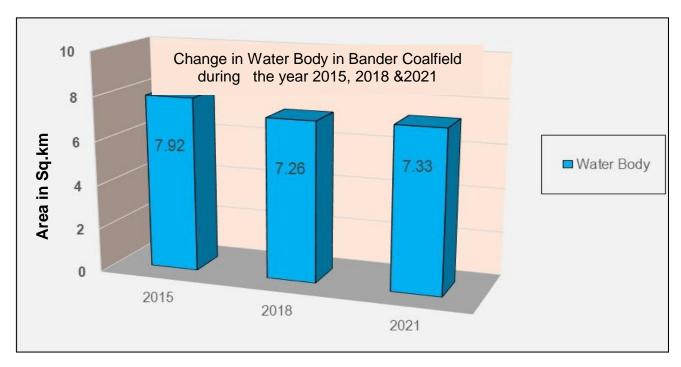


Figure-3.8

Chapter 4

Conclusion & Recommendations

4.1 Conclusion

In the present study, land use/Vegetation cover map of Bander Coalfield is prepared based on IRS-R2/ L4FX data of the year 2021 in order to generate the database on vegetation cover and land use pattern for the year 2021 for effective natural resource management and its planning. The Land use/vegetation cover analysis will help to analyse and monitor the impact of mining and other industrial activities in the area.

Study reveals that Bander Coalfields with old boundary covers an area of about 361.09 km². Settlements coming under the coalfield boundary cover area of 1.76 km² which is 0.48% of the total coalfield area. Vegetation cover constitutes 150.38 km² (41.65%), Mining activities is being carried out on 3.76 km² area which is 1.04 % of the total coalfield area whereas agriculture and wasteland are 185.79 km² (51.46%) and 12.07 km² (3.34%) respectively. Water bodies cover an area of 7.33 km² (2.03%). The detailed data analysis is given under Table-3.2.

Whereas modified boundary of Bander Coalfield covers an area of about 574.70 km², out of which vegetation covers, agriculture land, area under mining, waste land and water bodies cover an area of 232.59 Sq.km(40.47%), 297.81 Sq.km(51.82%), 2.91 Sq.km (0.50%), 24.86Sq.km(4.33%) and 13.51 Sq.km (2.35%) respectively.

4.2 Recommendations

Keeping in view the sustainable development together with coal mining in the area, it is recommended that;

- a) Similar study should be carried out regularly at interval of 3 years to monitor the change in land use/vegetation cover in the coalfield for assessing the impact of coal mining and take the remedial measures required, if any.
- **b)** Efforts for afforestation should be given thrust in the coalfield on wasteland and mined out area to maintain the ecological balance in the region.



Central Mine Planning & Design Institute Ltd. (A Subsidiary of Coal India Ltd.) Gondwana Place, Kanke Road, Ranchi 834031, Jharkhand Phone : (+91) 651 2230001, 2230002, 2230483, FAX (+91) 651 2231447, 2231851 Wesite : <u>www.cmpdi.co.in</u>, Email : cmpdihq@cmpdi.co.in